

FDA Compliant (FDA CFR 177.2600) Silicone Sleeves



Dust - Tight
Powder Transfer
Solutions




# A one-piece Tri-Clover compatible seal moulded from FDA compliant silicone

The **Uni-Connect** system is ideal for connecting two items of process equipment using Tri-Clover type couplings.

The use of the flexible connector provides a simple, effective method of height adjustment and also allows for misalignment.

The flexible sleeve is moulded in one piece from silicone. The silicone material complies with FDA CFR 177.2600 and is translucent.

The dust tight connection is ideal for material transfer and can be used to dampen any vibration problems.



Smooth bore Uni-Connect Joint



Normal 'stepped' sleeve Joint

### **Uni-Connect Assembly**



Diameter	Length
2''	40mm
4''	40mm
6''	50mm
8''	50mm
10''	60mm
12"	70mm

# www.hanningfield.com

Flexible Tri-Cover Connecting Sleeves


The Uni-Connect provides simple, low-cost height adjustment and easy separation between fixed pipework.


- Dust tight connection
- FDA compliant silicone
- · Flexibility for misalignment
- · Hygienic one-piece moulding
- · Easily disassemled and cleaned

#### Size Range

2'' - 4'' - 6'' - 8'' - 10'' - 12''





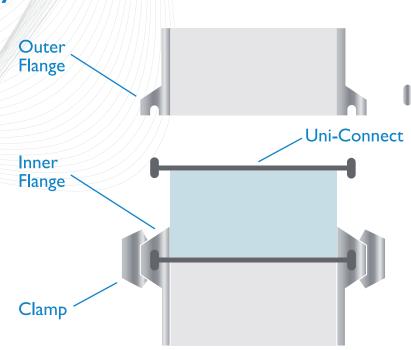



# UNITCONNECT


## **Uni-Connect Lite**


A supplementary range of silicone connector sleeves with lengths up to 200mm.

Uni-Connect Lite also offers increased flexibility over the standard Uni-Connect system.

Custom lengths can also be supplied on request, subject to quantity.

#### **Uni-Connect Sleeve**

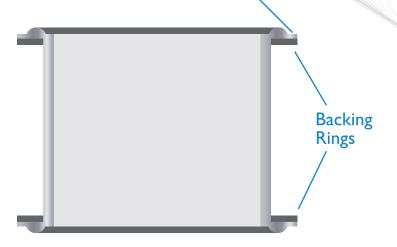



FDA compliant silicone

Flexibility for misalignment

Hygienic one-piece moulding

Includes super-light backing rings













Lightweight stainless steel backing rings are included with each sleeve, making assembly a simple operation.

The 4", 6" and 8" sleeves are available in 2 length options.

Diameter	Length I	Length 2
4''	70mm	I50mm
6''	100mm	200mm
8''	70mm	200mm
10"	I00mm	

Local Representative

